

2.54mm(.100") PIN HEADER

MATERIAL

Insulator: PBT+GF UL 94V-0
 Color: Black(Standard)
 Contact: Brass 0.64mm(.025") square pins
 Plating: Gold plated , Tin plated




SPECIFICATIONS

Temperature range: -25°C ~ +85°C
 Current rating: 3.0A
 Voltage rating: 250V AC
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 1000 MΩ Min.
 Contact resistance: 0.02 Ω Max.

Order Information

R 2200 xx x R xxx x S xxx
 1 2 3 4 5 6 7 8 9

1. RoHS
2. Series No.
3. Pin No.
4. Plating:
G:Gold plated
T: Tin plated
5. R:Right angle
6. Top End length
7. Color:
A:Black(Standard)
J:White
8. S:Single stack
9. Total length

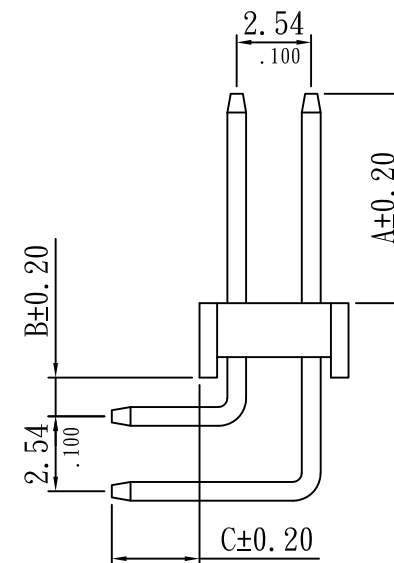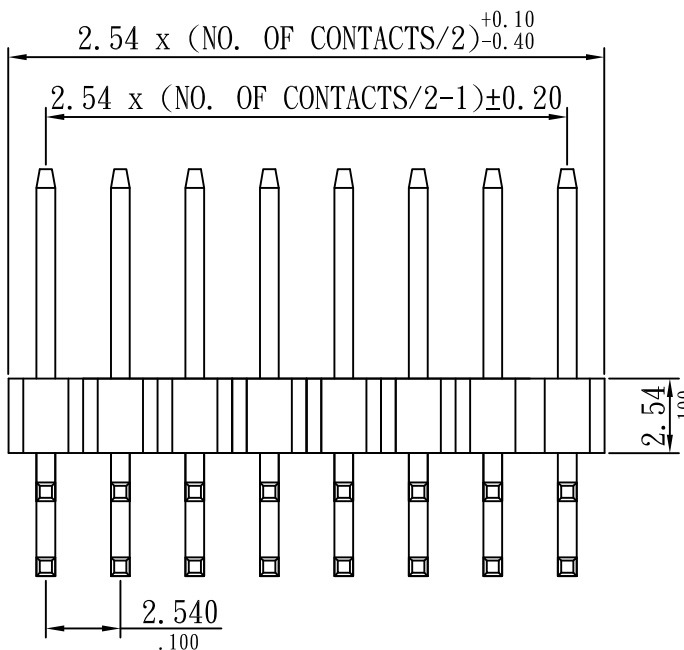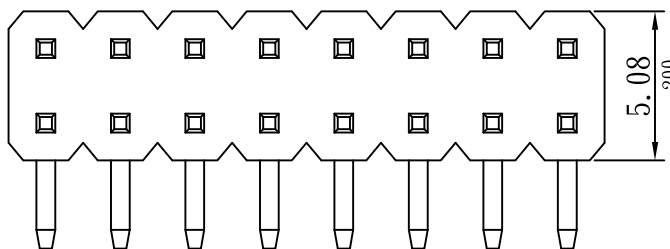

Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M111	NAME	DATE	SCALE: 4:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	RALF	2020.11.12	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	DEAN	2020.11.12	CAD NO	B				.00 ±0.20(.008)		
APPROVED	APPLE	2020.11.12	R2200 90° Series	C				.000±0.10(.004)		
PART NO		R2200 90° Series						PROJECTION:		

2.54mm(.100") PIN HEADER

MATERIAL

Insulator: PBT+GF UL 94V-0
 Color: Black(Standard)
 Contact: Brass 0.64mm(.025") square pins
 Plating: Gold plated , Tin plated







SPECIFICATIONS

Temperature range: -25°C ~ +85°C
 Current rating: 3.0A
 Voltage rating: 250V AC
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 1000 MΩ Min.
 Contact resistance: 0.02 Ω Max.

Order Information

R 2200 xx x S xxx x S xxx
 1 2 3 4 5 6 7 8 9

1. RoHS
2. Series No.
3. Pin No.
4. Plating:
G:Gold plated
T:Tin plated
5. S: Straight angle
6. Top End length
7. Color:
A:Black(Standard)
J:White
8. S: Single stack
D: Double stack
9. Total length

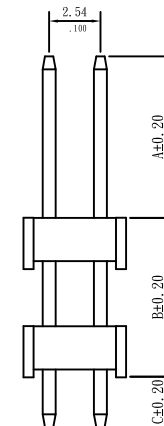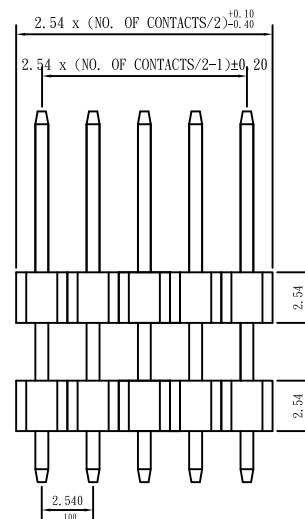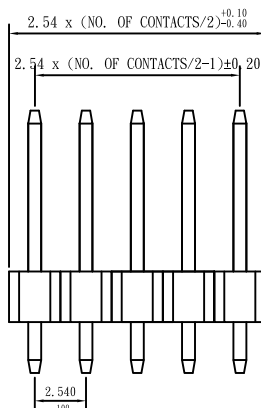

S.Y.E. Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M111	NAME	DATE	SCALE: 4:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	RALF	2020. 11. 12	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	DEAN	2020. 11. 12	CAD NO	B				.00 ±0.20(.008)		
APPROVED	APPLE	2020. 11. 12	R2200 180° Series	C				.000±0.10(.004)		
PART NO		R2200 180° Series						PROJECTION:		