

2.50mm(.098") WAFER 180°

MATERIAL

Insulator: Nylon 66 UL94V-0
 Color: White
 Contact: Brass $\phi 0.70\text{mm}(.028\text{'})$ round pins
 Plating: Tin plated





SPECIFICATIONS

Temperature range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Current rating: 3.0A AC
 Voltage rating: 250V AC
 Dielectric withstand voltage: 1000V AC
 Insulation resistance: 1000 M Ω Min.
 Contact resistance: 0.02 Ω Max.
 Mates with S.Y.E. R2580-xxP housing

Order Information

R 2581-xx T S
 1 2 3 4 5

1. RoHS
2. Series
3. Pin No.
4. Tin Plated
5. Straight angle

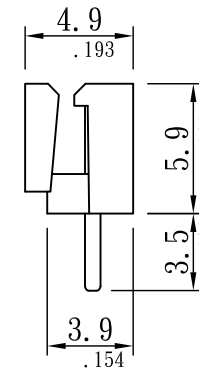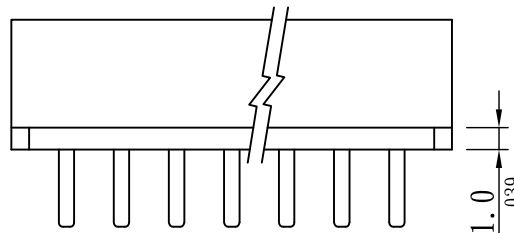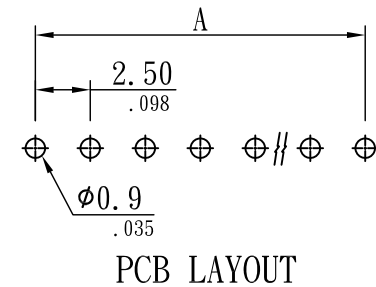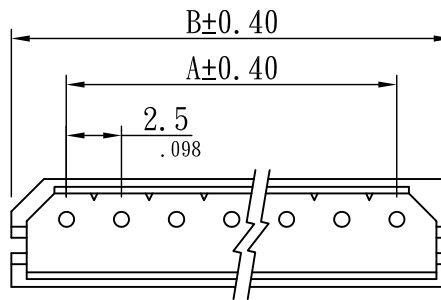

Dimensional Information

Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B	
	mm	in	mm	in		mm	in	mm	in
2	2.50	0.098	7.50	0.295	12	27.50	1.083	32.50	1.280
3	5.00	0.197	10.00	0.394	13	30.00	1.181	35.00	1.378
4	7.50	0.295	12.50	0.492	14	32.50	1.280	37.50	1.476
5	10.00	0.394	15.00	0.591	15	35.00	1.378	40.00	1.575
6	12.50	0.492	17.50	0.689	16	37.50	1.476	42.50	1.673
7	15.00	0.591	20.00	0.787	17	40.00	1.575	45.00	1.772
8	17.50	0.689	22.50	0.886	18	42.50	1.673	47.50	1.870
9	20.00	0.787	25.00	0.984	19	45.00	1.772	50.00	1.969
10	22.50	0.886	27.50	1.083	20	47.50	1.870	52.50	2.067
11	25.00	0.984	30.00	1.181					



Sunny Young Enterprise Co., Ltd. S. Y. E. http://www.sunnyyoung.com.tw 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668	M044	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
	DRAWN	RALF	2023.03.23	UNIT: mm(in.)	A					LINEAR±	.0 ±0.40(.016)
	CHECKED	DEAN	2023.03.23	CAD NO	B						.00 ±0.25(.010)
	APPROVED	JUDY	2023.03.23	R2581-xxTS	C						.000±0.08(.003)
PART NO	R2581-xxTS		APPROVED		JUDY	2023.03.23	R2581-xxTS	C	PROJECTION:		