





2.54mm(.100") P. C. B. MOUNTING 180°

MATERIAL

Insulator: PBT UL 94V-0
 Color: Black
 Contact: Brass
 Plating: Gold plated

SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 1.0A
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 3000 MΩ Min.
 Contact resistance: 0.03Ω Max.

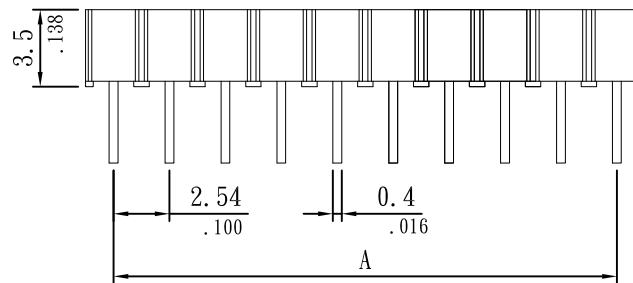

Dimensional Information

Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B	
	mm	in	mm	in		mm	in	mm	in		mm	in	mm	in
2	2.54	0.100	5.08	0.200	15	35.56	1.400	38.10	1.500	28	68.58	2.700	71.12	2.800
3	5.08	0.200	7.62	0.300	16	38.10	1.500	40.64	1.600	29	71.12	2.800	73.66	2.900
4	7.62	0.300	10.16	0.400	17	40.64	1.600	43.18	1.700	30	73.66	2.900	76.20	3.000
5	10.16	0.400	12.70	0.500	18	43.18	1.700	45.72	1.800	31	76.20	3.000	78.74	3.100
6	12.70	0.500	15.24	0.600	19	45.72	1.800	48.26	1.900	32	78.74	3.100	81.28	3.200
7	15.24	0.600	17.78	0.700	20	48.26	1.900	50.80	2.000	33	81.28	3.200	83.82	3.300
8	17.78	0.700	20.32	0.800	21	50.80	2.000	53.34	2.100	34	83.82	3.300	86.36	3.400
9	20.32	0.800	22.86	0.900	22	53.34	2.100	55.88	2.200	35	86.36	3.400	88.90	3.500
10	22.86	0.900	25.40	1.000	23	55.88	2.200	58.42	2.300	36	88.90	3.500	91.44	3.600
11	25.40	1.000	27.94	1.100	24	58.42	2.300	60.96	2.400	37	91.44	3.600	93.98	3.700
12	27.94	1.100	30.48	1.200	25	60.96	2.400	63.50	2.500	38	93.98	3.700	96.52	3.800
13	30.48	1.200	33.02	1.300	26	63.50	2.500	66.04	2.600	39	96.52	3.800	99.06	3.900
14	33.02	1.300	35.56	1.400	27	66.04	2.600	68.58	2.700	40	99.06	3.900	101.60	4.000

Order Information

R 2805-xx G S-S
 1 2 3 4 5 6

1. RoHS
2. Series
3. Pin No.
4. Gold plated
5. Straight angle
6. Single row

Sunny Young Enterprise Co., Ltd. S. Y. E. http://www.sunnyyoung.com.tw 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668	M010	NAME	DATE	SCALE: 3:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
	DRAWN	YXF	2009.02.12	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
	CHECKED	PIQI	2009.02.12	CAD NO	B						.00 ±0.20(.008)
	APPROVED	PC	2009.02.12	R2805-xxGS-S	C						.000±0.10(.004)
PART NO	R2805-xxGS-S										PROJECTION:





2.54mm(.100") P.C.B. MOUNTING 180°

MATERIAL

Insulator: PBT UL 94V-0
 Color: Black
 Contact: Brass
 Plating: Gold plated

SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 1.0A
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 3000 MΩ Min.
 Contact resistance: 0.03Ω Max.

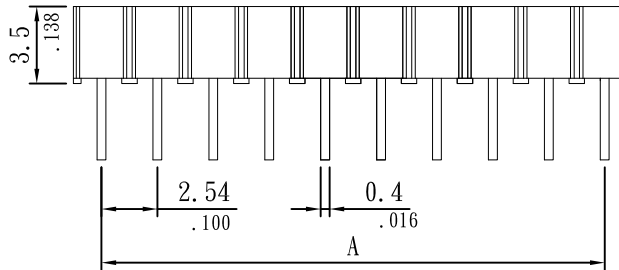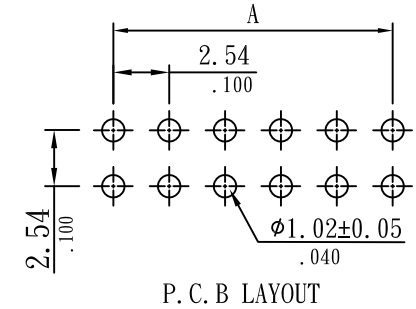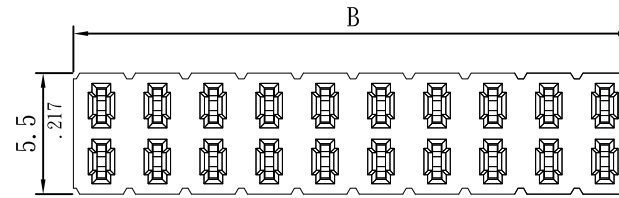

Dimensional Information

Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B	
	mm	in	mm	in		mm	in	mm	in		mm	in	mm	in
4	2.54	0.100	5.08	0.200	30	35.56	1.400	38.10	1.500	56	68.58	2.700	71.12	2.800
6	5.08	0.200	7.62	0.300	32	38.10	1.500	40.64	1.600	58	71.12	2.800	73.66	2.900
8	7.62	0.300	10.16	0.400	34	40.64	1.600	43.18	1.700	60	73.66	2.900	76.20	3.000
10	10.16	0.400	12.70	0.500	36	43.18	1.700	45.72	1.800	62	76.20	3.000	78.74	3.100
12	12.70	0.500	15.24	0.600	38	45.72	1.800	48.26	1.900	64	78.74	3.100	81.28	3.200
14	15.24	0.600	17.78	0.700	40	48.26	1.900	50.80	2.000	66	81.28	3.200	83.82	3.300
16	17.78	0.700	20.32	0.800	42	50.80	2.000	53.34	2.100	68	83.82	3.300	86.36	3.400
18	20.32	0.800	22.86	0.900	44	53.34	2.100	55.88	2.200	70	86.36	3.400	88.90	3.500
20	22.86	0.900	25.40	1.000	46	55.88	2.200	58.42	2.300	72	88.90	3.500	91.44	3.600
22	25.40	1.000	27.94	1.100	48	58.42	2.300	60.96	2.400	74	91.44	3.600	93.98	3.700
24	27.94	1.100	30.48	1.200	50	60.96	2.400	63.50	2.500	76	93.98	3.700	96.52	3.800
26	30.48	1.200	33.02	1.300	52	63.50	2.500	66.04	2.600	78	96.52	3.800	99.06	3.900
28	33.02	1.300	35.56	1.400	54	66.04	2.600	68.58	2.700	80	99.06	3.900	101.60	4.000

Order Information

R 2805-xx G S-D
 1 2 3 4 5 6

1. RoHS
2. Series
3. Pin No.
4. Gold plated
5. Straight angle
6. Dual row



Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M010	NAME	DATE	SCALE: 3:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	YXF	2009.02.12	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	PIQI	2009.02.12	CAD NO	B						.00 ±0.20(.008)
APPROVED	PC	2009.02.12	R2805-xxGS-D	C						.000±0.10(.004)

PART NO R2805-xxGS-D

PROJECTION: