





2.54mm(.100") BOX HEADER SMT TYPE

MATERIAL

Insulator: Nylon 6T UL 94V-0
 Color: Black
 Contact: Copper alloy 0.64mm(.025") square pin
 Plating: Gold plated

SPECIFICATIONS

Temperature range: -55°C ~ +105°C
 Current rating: 3.0A
 Dielectric withstand voltage: 1000V AC
 Insulation resistance: 1000 MΩ Min.

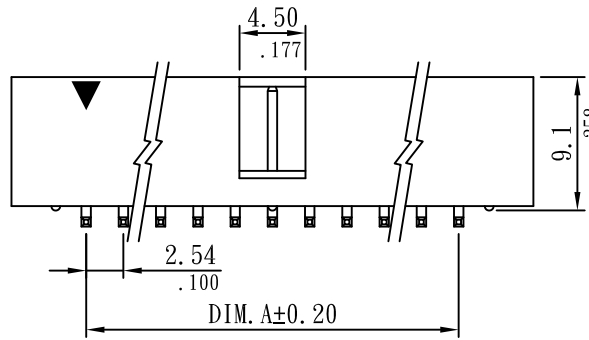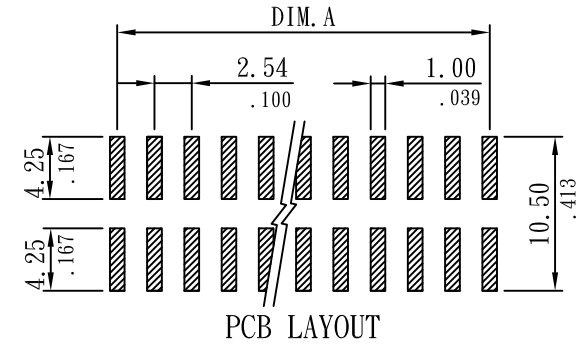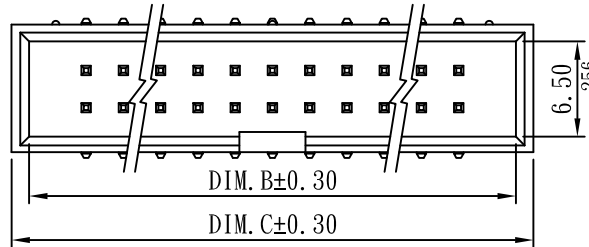

Order Information

R 3015-xx G S -SMT
 1 2 3 4 5 6

Dimensional Information

Circuits	DIM. A		DIM. B		DIM. C		Circuits	DIM. A		DIM. B		DIM. C	
	mm	in	mm	in	mm	in		mm	in	mm	in	mm	in
6	5.08	0.200	12.94	0.509	15.24	0.600	24	27.94	1.100	35.80	1.409	38.10	1.500
8	7.62	0.300	15.48	0.609	17.78	0.700	26	30.48	1.200	38.34	1.509	40.64	1.600
10	10.16	0.400	18.02	0.709	20.32	0.800	30	35.56	1.400	43.42	1.709	45.72	1.800
12	12.70	0.500	20.56	0.809	22.86	0.900	34	40.64	1.600	48.50	1.909	50.80	2.000
14	15.24	0.600	23.10	0.909	25.40	1.000	40	48.26	1.900	56.12	2.209	58.42	2.300
16	17.78	0.700	25.64	1.009	27.94	1.100	44	53.34	2.100	61.20	2.409	63.50	2.500
20	22.86	0.900	30.72	1.209	33.02	1.300	50	60.96	2.400	68.82	2.709	71.12	2.800



1. RoHS
2. Series
3. Pin No.
4. Gold plated
5. Straight angle
6. SMT type

Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M065	NAME	DATE	SCALE: 2:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	PC	2012.09.14	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	ALBERT	2012.09.14	CAD NO	B				.00 ±0.20(.008)		
APPROVED	TINA	2012.09.14	R3015-xxGS-SMT	C				.000±0.10(.004)		
PART NO	R3015-xxGS-SMT								PROJECTION:	