

2.54mm(.100") CARD EDGE IDC TYPE

MATERIAL

Insulator: PBT+GF UL 94V-0
 Color: Black
 Contact: Brass or phosphor bronze
 Plating: Tin plated






SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 1.0A
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 3000 MΩ Min.
 Contact resistance: 0.03Ω Max.

Order Information

R 3140-xxP
 1 2 3

1. RoHS
2. Series No.
3. Pin No.

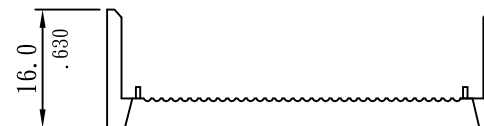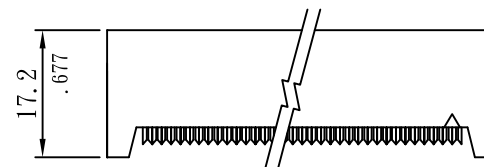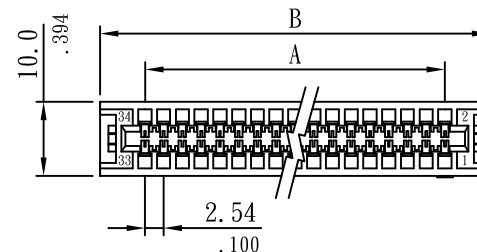

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
10	10.16(0.400)	22.36(0.880)	40	48.26(1.900)	60.46(2.380)
14	15.24(0.600)	27.44(1.080)	44	53.34(2.100)	65.54(2.580)
16	17.78(0.700)	29.98(1.180)	50	60.96(2.400)	73.16(2.880)
20	22.86(0.900)	35.06(1.380)	60	73.66(2.900)	85.86(3.380)
26	30.48(1.200)	42.68(1.680)	62	76.20(3.000)	88.40(3.480)
34	40.64(1.600)	52.84(2.080)	64	78.74(3.100)	90.94(3.580)



Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M010	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED		
DRAWN	PC	2012. 11. 20	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)	
CHECKED			CAD NO	B						.00 ±0.20(.008)	
APPROVED	TINA	2012. 11. 20	R3140-xxP	C						.000±0.10(.004)	
PART NO										R3140-xxP	PROJECTION: