

2.54mm(.100") FPC/FFC CONNECTOR DIP TYPE 180°

MATERIAL

Insulator: Nylon 9T
 Color: Black
 Contact: Phosphor Bronze
 Plating: Tin plated

SPECIFICATIONS

Temperature range: -20°C ~ +85°C
 Current rating: 0.5A
 Voltage rating: 50V AC
 Dielectric withstand voltage: 500V AC/minute
 Insulation resistance: 500 MΩ Min.
 Contact resistance: 0.03Ω Max.





Order Information

R 3202-xx T S
 T 2 3 4 5

- RoHS
- Series No.
- Pin No.
- Tin plated
- Straight angle

Dimensional Information

Circuits	DIM. A		DIM. B		DIM. C		Circuits	DIM. A		DIM. B		DIM. C	
	mm	in	mm	in	mm	in		mm	in	mm	in	mm	in
2	2.54	0.100	8.43	0.332	10.54	0.415	15	35.56	1.400	41.45	1.632	43.56	1.715
3	5.08	0.200	10.97	0.432	13.08	0.515	16	38.10	1.500	43.99	1.732	46.10	1.815
4	7.62	0.300	13.51	0.532	15.62	0.615	17	40.64	1.600	46.53	1.832	48.64	1.915
5	10.16	0.400	16.05	0.632	18.16	0.715	18	43.18	1.700	49.07	1.932	51.18	2.015
6	12.70	0.500	18.59	0.732	20.70	0.815	19	45.72	1.800	51.61	2.032	53.72	2.115
7	15.24	0.600	21.13	0.832	23.24	0.915	20	48.26	1.900	54.15	2.132	56.26	2.215
8	17.78	0.700	23.67	0.932	25.78	1.015	21	50.80	2.000	56.69	2.232	58.80	2.315
9	20.32	0.800	26.21	1.032	28.32	1.115	22	53.34	2.100	59.23	2.332	61.34	2.415
10	22.86	0.900	28.75	1.132	30.86	1.215	23	55.88	2.200	61.77	2.432	63.88	2.515
11	25.40	1.000	31.29	1.232	33.40	1.315	24	58.42	2.300	64.31	2.532	66.42	2.615
12	27.94	1.100	33.83	1.332	35.94	1.415	25	60.96	2.400	66.85	2.632	68.96	2.715
13	30.48	1.200	36.37	1.432	38.48	1.515	26	63.50	2.500	69.39	2.732	71.50	2.815
14	33.02	1.300	38.91	1.532	41.02	1.615							

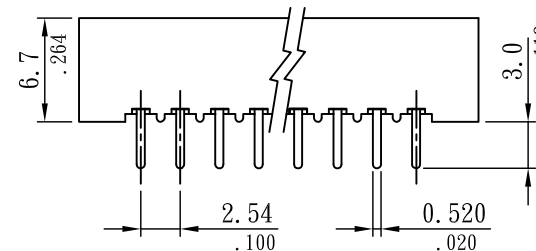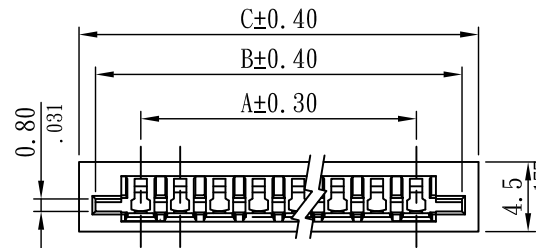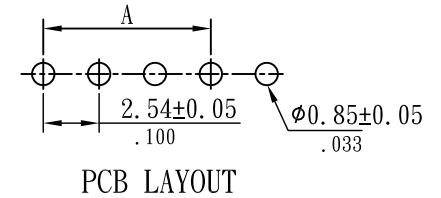

Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M246	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	RALF	2023.08.17	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	DEAN	2023.08.17	CAD NO	B						.00 ±0.20(.008)
APPROVED	JUDY	2023.08.17	R3202-xxTS	C						.000±0.10(.004)
PART NO R3202-xxTS									PROJECTION:	

