

2.54mm(.100") HEADER 90°

MATERIAL

Insulator: PBT UL 94V-0
 Color: Black
 Contact: Brass 0.64mm(.025") square pins
 Plating: Gold plated





SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 3.0A
 Voltage rating: 250V AC
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 1000 MΩ Min.
 Contact resistance: 0.02Ω Max.

Order Information

R 3300 xxx G R 060 A S 238
 1 2 3 4 5 6 7 8 9

1. RoHS
2. Series No.
3. Pin No.
4. Gold plated
5. Right angle
6. Top end length: 6.0mm
7. Color: A=Black
8. Single stack
9. Total length: 23.8mm

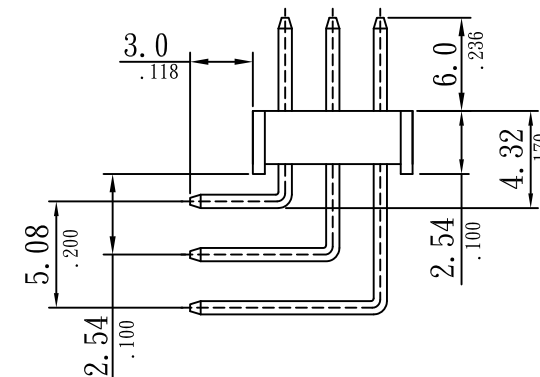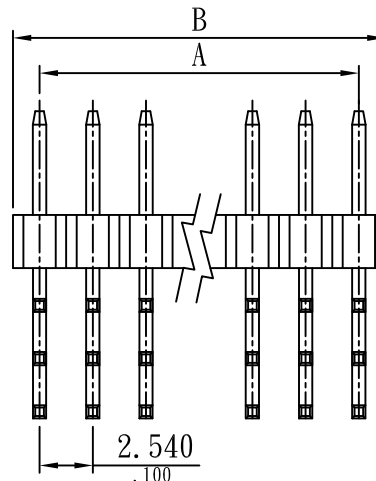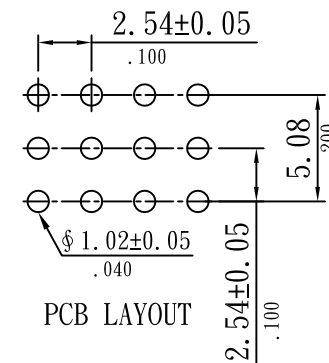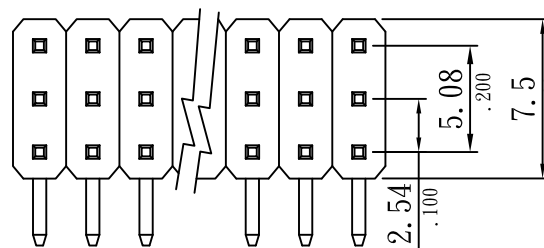

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
6	2.54(0.100)	5.08(0.200)	45	35.56(1.400)	38.10(1.500)	84	68.58(2.700)	71.12(2.800)
9	5.08(0.200)	7.62(0.300)	48	38.10(1.500)	40.64(1.600)	87	71.12(2.800)	73.66(2.900)
12	7.62(0.300)	10.16(0.400)	51	40.64(1.600)	43.18(1.700)	90	73.66(2.900)	76.20(3.000)
15	10.16(0.400)	12.70(0.500)	54	43.18(1.700)	45.72(1.800)	93	76.20(3.000)	78.74(3.100)
18	12.70(0.500)	15.24(0.600)	57	45.72(1.800)	48.26(1.900)	96	78.74(3.100)	81.28(3.200)
21	15.24(0.600)	17.78(0.700)	60	48.26(1.900)	50.80(2.000)	99	81.28(3.200)	83.82(3.300)
24	17.78(0.700)	20.32(0.800)	63	50.80(2.000)	53.34(2.100)	102	83.82(3.300)	86.36(3.400)
27	20.32(0.800)	22.86(0.900)	66	53.34(2.100)	55.88(2.200)	105	86.36(3.400)	88.90(3.500)
30	22.86(0.900)	25.40(1.000)	69	55.88(2.200)	58.42(2.300)	108	88.90(3.500)	91.44(3.600)
33	25.40(1.000)	27.94(1.100)	72	58.42(2.300)	60.96(2.400)	111	91.44(3.600)	93.98(3.700)
36	27.94(1.100)	30.48(1.200)	75	60.96(2.400)	63.50(2.500)	114	93.98(3.700)	96.52(3.800)
39	30.48(1.200)	33.02(1.300)	78	63.50(2.500)	66.04(2.600)	117	96.52(3.800)	99.06(3.900)
42	33.02(1.300)	35.56(1.400)	81	66.04(2.600)	68.58(2.700)	120	99.06(3.900)	101.60(4.000)

Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M111	NAME	DATE	SCALE: 1:2.8	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	JINDD	2013.08.09	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED	SEAN	2013.08.09	CAD NO	B				.00 ±0.20(.008)		
APPROVED	TINA	2013.08.09	R3300xxxGR060AS238	C				.000±0.10(.004)		
PART NO	R3300xxxGR060AS238								PROJECTION:	