



2.54mm(.100") ROUND PIN I.C. SOCKET

MATERIAL



Insulator: Thermoplastic +GF UL 94V-0
 Color: Black
 Pin: Brass
 Plating: Tin plated
 Clip: Beryllium copper
 Clip plating: Gold plated

SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 3.0A
 Voltage rating: 150V DC
 Insulation resistance: 10000 MΩ Min.
 Contact resistance: 0.004 Max.

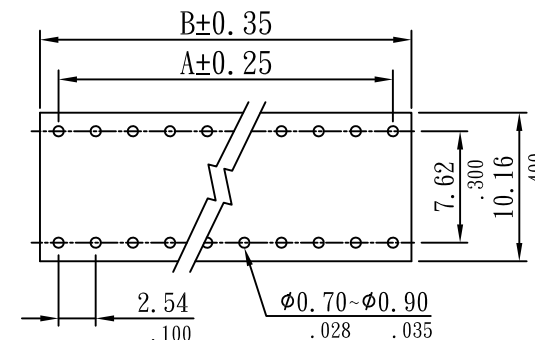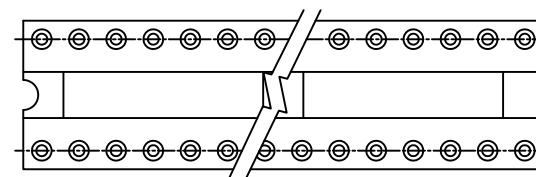

PCB LAYOUT

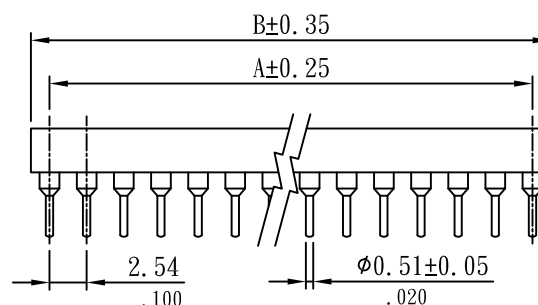

Order Information

R 3310-xxP
 1 2 3

1. RoHS
2. Series
3. Pin No.



Dimensional Information

Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B	
	mm	in	mm	in		mm	in	mm	in
6	5.08	0.200	7.62	0.300	18	20.32	0.800	22.86	0.900
8	7.62	0.300	10.16	0.400	20	22.86	0.900	25.40	1.000
10	10.16	0.400	12.70	0.500	24	27.94	1.100	30.48	1.200
14	15.24	0.600	17.78	0.700	28	33.02	1.300	35.56	1.400
16	17.78	0.700	20.32	0.800					



Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

PART NO

R3310-xxP

APPROVED

TINA

2013. 01. 08

R3310-xxP

C

DESCRIPTION

BY

CHECKED

TOLERANCE UNLESS NOTED

LINEAR±

.0 ±0.30(.012)

.00 ±0.20(.008)

.000±0.10(.004)

PROJECTION:





2.54mm(.100") ROUND PIN I.C. SOCKET

MATERIAL



Insulator: Thermoplastic +GF UL 94V-0
 Color: Black
 Pin: Brass
 Plating: Tin plated
 Clip: Beryllium copper
 Clip plating: Gold plated

SPECIFICATIONS

Temperature range: -40°C ~ +105°C
 Current rating: 3.0A
 Voltage rating:: 150V DC
 Insulation resistance: 10000 MΩ Min.
 Contact resistance: 0.004 Max.

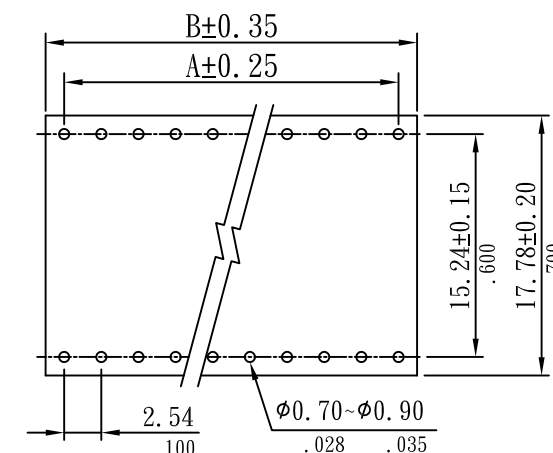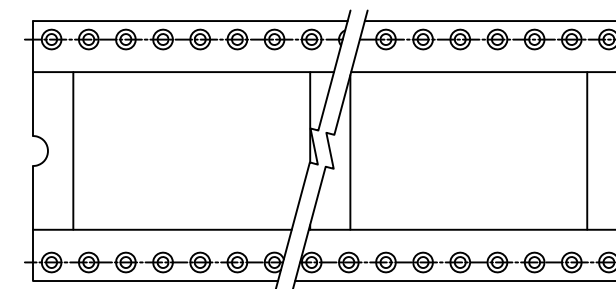

PCB LAYOUT

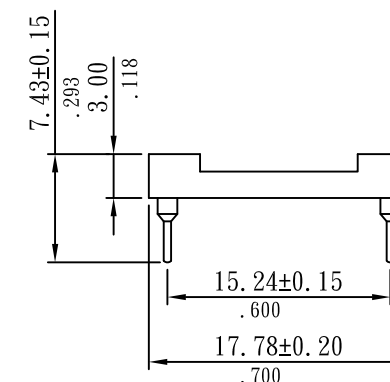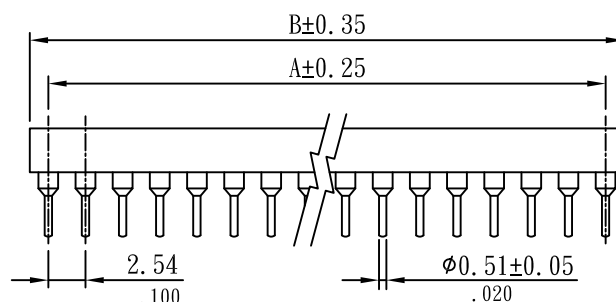

Dimensional Information

Circuits	DIM. A		DIM. B		Circuits	DIM. A		DIM. B	
	mm	in	mm	in		mm	in	mm	in
24	27.94	1.100	30.48	1.200	42	50.80	2.000	53.34	2.100
28	33.02	1.300	35.56	1.400	48	58.42	2.300	60.96	2.400
32	38.10	1.500	40.64	1.600	50	60.96	2.400	63.50	2.500
36	43.18	1.700	45.72	1.800	52	63.50	2.500	66.04	2.600
40	48.26	1.900	50.80	2.000					

Order Information

R 3311-xxP
 1 2 3

1. RoHS
2. Series
3. Pin No.



Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668 (REP) Fax: +886 2 2696 2668

M209	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	SEAN	2013. 01. 09	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)
CHECKED			CAD NO	B						.00 ±0.20(.008)
APPROVED	TINA	2013. 01. 09	R3311-xxP	C						.000±0.10(.004)
PART NO	R3311-xxP								PROJECTION:	