

1.27mm(.016") PIN HEADER

MATERIAL

Insulator: PBT+GF UL 94V-0
 Color: Black(Standard)
 Contact: Brass 0.40mm(.025") square pins
 Plating: Gold plated , Tin plated







SPECIFICATIONS

Temperature range: -55°C ~ +105°C
 Current rating: 1.0A
 Voltage rating: 100V AC
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 1000 MΩ Min.
 Contact resistance: 0.02 Ω Max.

Order Information

R 6100 xx x R xxx x S xxx x xx
 1 2 3 4 5 6 7 8 9 10 11

- 1. RoHS
- 2. Series No.
- 3. Pin No.
- 4. Plating: C:C TYPE
G:Gold plated
T:Tin plated
- 5. R:Right angle
- 6. Top End length
- 7. Color: A:Black(Standard)
J:White
- 8. S:Single stack
- 9. Total length
- 10. TYPE: F:F TYPE
- 11. Serial No.

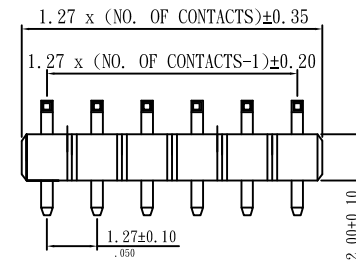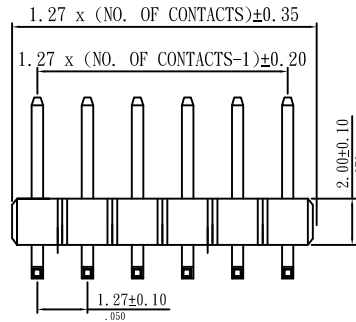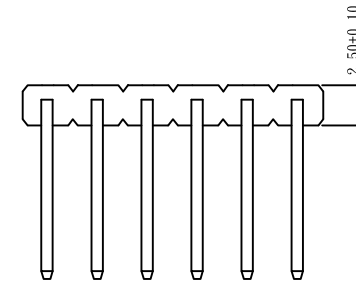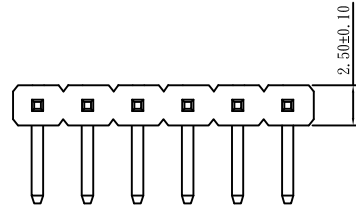

Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M122	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	RALF	2020. 11. 12	UNIT: mm(in.)	A					LINEAR±	.0 ±0.38(.015)
CHECKED	DEAN	2020. 11. 12	CAD NO	B						.00 ±0.25(.010)
PART NO	R6100 90° Series	APPROVED	APPLE	2020. 11. 12	R6100 90° Series	C				PROJECTION:

1.27mm(.016") PIN HEADER

MATERIAL

Insulator: PBT+GF UL 94V-0
 Color: Black(Standard)
 Contact: Brass 0.40mm(.025") square pins
 Plating: Gold plated , Tin plated







SPECIFICATIONS

Temperature range: -55°C ~ +105°C
 Current rating: 1.0A
 Voltage rating: 100V AC
 Dielectric withstand voltage: 500V AC
 Insulation resistance: 1000 MΩ Min.
 Contact resistance: 0.02 Ω Max.

Order Information

R 6100 xx x S xxx x S xxx
 1 2 3 4 5 6 7 8 9

- | | |
|--------------------|-------------------|
| 1. RoHS | |
| 2. Series No. | 6. Top End length |
| 3. Pin No. | 7. Color: |
| 4. Plating: | A:Black(Standard) |
| G:Gold plated | J:White |
| T:Tin plated | 8.S:Single stack |
| 5.S:Straight angle | D:Double stack |
| | 9.Total length |

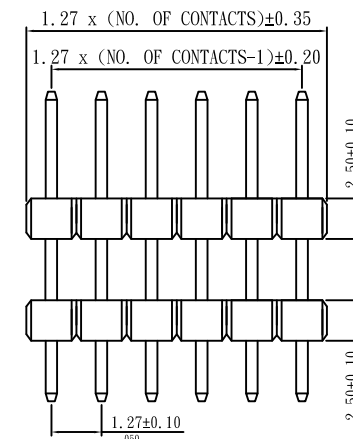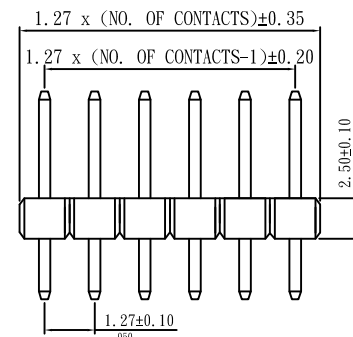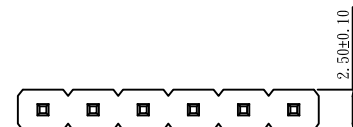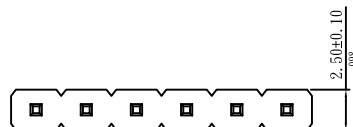

Sunny Young Enterprise Co., Ltd.
 S. Y. E. <http://www.sunnyyoung.com.tw>
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M122	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	RALF	2020. 11. 12	UNIT: mm(in.)	A					LINEAR±	.0 ±0.38(.015)
CHECKED	DEAN	2020. 11. 12	CAD NO	B						.00 ±0.25(.010)
PART NO	R6100 180° Series	APPROVED	APPLE	2020. 11. 12	R6100 180° Series	C				PROJECTION: