

# 1.27mm x 1.27mm(.050" x .050") PIN HEADER

## MATERIAL

Insulator: Nylon 6T UL 94V-0  
 Cap: Nylon 9T UL 94V-0  
 Color: Black  
 Contact: Brass 0.40mm(.016") square pin  
 Plating: Gold plated or Tin plated




## SPECIFICATIONS

Temperature range: -55°C ~ +105°C  
 Current rating: 1.0A  
 Voltage rating: 125V AC  
 Dielectric withstand voltage: 600V AC  
 Insulation resistance: 1000 MΩ Min.  
 Contact resistance: 0.03Ω Max.

## Order Information

R 6215 xx x S xxx A S xxx-N C  
 1 2 3 4 5 6 7 8 9 10 11

- |                   |                  |
|-------------------|------------------|
| 1. RoHS           | 7. Black         |
| 2. Series No.     | 8. Single stack  |
| 3. Pin No.        | 9. Total length  |
| 4. G:Gold plated  | 10. Without post |
| T: Tin pltted     | 11. With Cap     |
| 5. Straight angle |                  |
| 6. Top End length |                  |

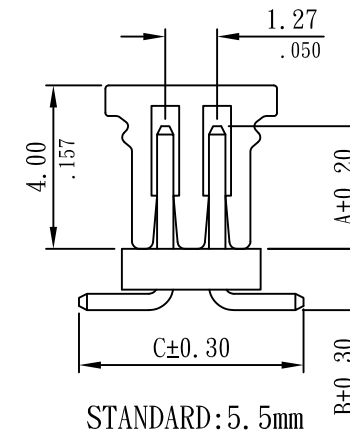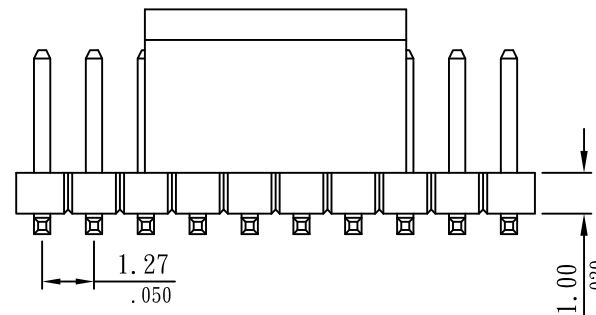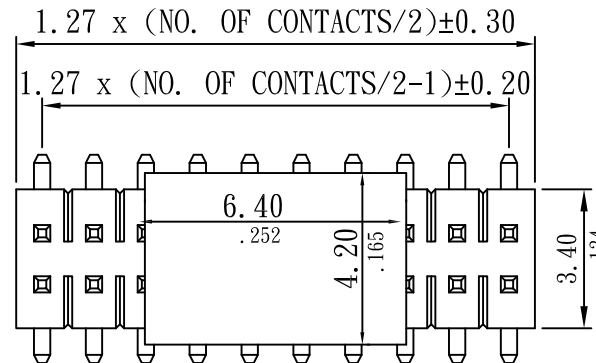

**Sunny Young Enterprise Co., Ltd.**  
 S. Y. E. <http://www.sunnyyoung.com.tw>  
 13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan  
 Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M065	NAME	DATE	SCALE: 4:1	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED		
DRAWN	RALF	2019.06.06	UNIT: mm(in.)	A					LINEAR±	.0 ±0.30(.012)	
CHECKED	EASON	2019.06.06	CAD NO	B						.00 ±0.20(.008)	
APPROVED	APPLE	2019.06.06	R6215 SMT Series	C						.000±0.10(.004)	
PART NO	R6215 SMT Series		APPROVED		APPLE	2019.06.06	R6215 SMT Series	C	PROJECTION:		