


1.27x1.27mm(.050x.050") I. D. C SOCKET

MATERIAL

Insulator: PBT UL 94V-0 ▲
 Contact: Phosphor Bronze ▲
 Finish: Gold plated over Nickel ▲

SPECIFICATIONS ▲

Temperature range: -40°C ~ +105°C
 Current rating: 0.5A
 Insulation resistance: 1000 MΩ Min.
 Contact resistance: 0.03Ω Max.

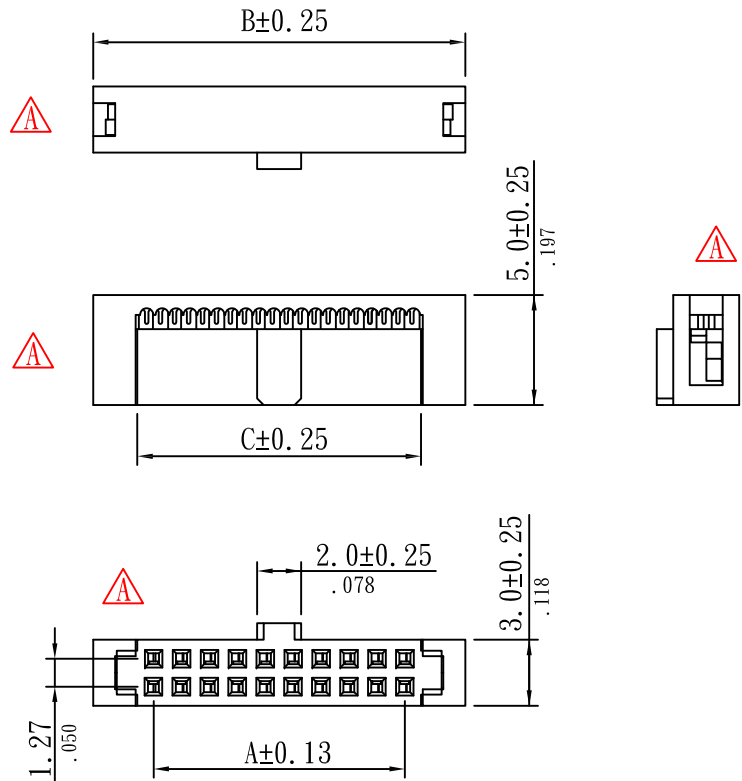

Order Information

R 6920-xxP
 1 2 3

1. RoHS
2. Series No.
3. Pin No.

Dimensional Information

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
6	2.54(0.100)	8.04(0.317)	4.01(0.158)	30	17.78(0.700)	23.28(0.917)	19.25(0.758)
8	3.81(0.150)	9.31(0.367)	5.28(0.208)	34	20.32(0.800)	25.82(1.017)	21.79(0.858)
10	5.08(0.200)	10.58(0.417)	6.55(0.258)	40	24.13(0.950)	29.63(1.167)	25.60(1.008)
12	6.35(0.250)	11.85(0.467)	7.82(0.308)	44	26.67(1.050)	32.17(1.267)	28.14(1.108)
14	7.62(0.300)	13.12(0.517)	9.09(0.358)	50	30.48(1.200)	35.98(1.417)	31.95(1.258)
16	8.89(0.350)	14.39(0.567)	10.36(0.408)	60	36.83(1.450)	42.33(1.667)	38.30(1.508)
20	11.43(0.450)	16.93(0.667)	12.90(0.508)	64	39.37(1.550)	44.87(1.767)	40.84(1.608)
24	13.97(0.550)	19.47(0.767)	15.44(0.608)	66	40.64(1.600)	46.14(1.817)	42.11(1.658)
26	15.24(0.600)	20.74(0.817)	16.71(0.658)	68	41.91(1.650)	47.41(1.867)	43.38(1.708)



Sunny Young Enterprise Co., Ltd.

S. Y. E. <http://www.sunnyyoung.com.tw>

13F., No. 116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886 2 2696 1668(REP) Fax: +886 2 2696 2668

M127	NAME	DATE	SCALE: 1:3	REV NO	DATE	DESCRIPTION	BY	CHECKED	TOLERANCE UNLESS NOTED	
DRAWN	PC	2009. 11. 24	UNIT: mm(in.)	A	2015. 03. 19	CHANGE CONNECTOR STRUCTURE CHANGE MATERIAL ADD DIMENSION&SPECIFICATIONS	CSH	SONIA	LINEAR±	.0 ±0.30(.012)
CHECKED	CMM	2009. 11. 24	CAD NO	B					.00 ±0.20(.008)	
APPROVED	YXF	2009. 11. 24	R6920-xxxP	C					.000±0.10(.004)	
PART NO R6920-xxxP										PROJECTION: