D-SUB FEMALE 180° PCB TYPE

MATERIAL

Insulator:	PBT UL 94-V0
Color:	Blue/Black/White
Contact:	Brass t=0.20mm
Shell:	Cold rolled stell t=0.40mm
Contacts Plating:	Selective gold
Shell Plating:	Tin/Nickel plated

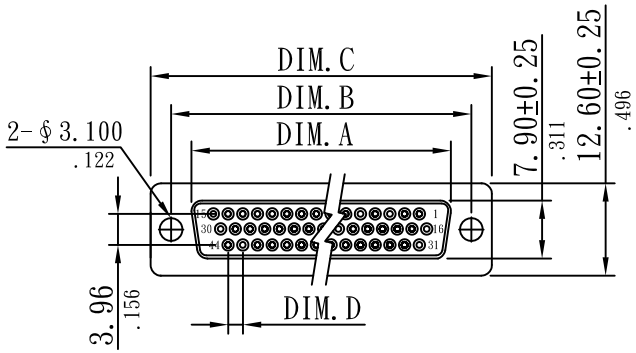

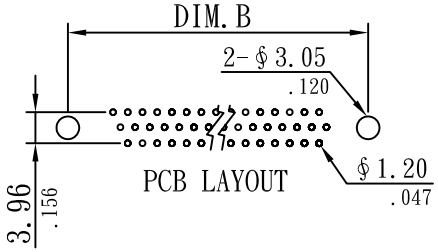

SPECIFICATIONS

Temperature range:	-55℃ ~ +105℃
Current rating:	1.0A
Dielectric withstand voltage:	500V AC
Insulation resistance:	1000 MΩ Min.
Contact resistance:	0.03Ω Max.

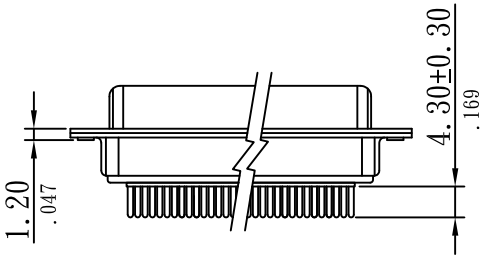

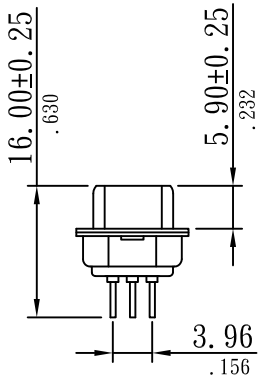

Order Information

R 7410-xx F x
1 2 3 4 5

1. RoHS
2. Series No.
3. Pin No.
4. Female
5. Color:
   A=Black G=Blue J=White

Dimensional Information

Circuits	DIM. A		DIM. B		DIM. C		DIM. D	
	mm	in	mm	in	mm	in	mm	in
15	16.30	0.642	25.00	0.984	30.80	1.213	2.29	0.090
26	24.70	0.972	33.32	1.312	39.20	1.543	2.29	0.090
44	38.40	1.512	47.04	1.852	53.05	2.089	2.29	0.090
62	54.80	2.157	63.50	2.500	69.40	2.732	2.41	0.095

SUNNY YOUNG ENTERPRISE CO., LTD.
工 程
2019.08.12
承認章
台洋企業有限公司

Sunny Young Enterprise Co., Ltd.
S.Y.E. http://www.sunnyyoung.com.tw
13F., No.116, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel:+886 2 2696 1668(REP) Fax:+886 2 2696 2668

PART NO	R7410-xxFx

T041	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED
DRAWN	YXF	2009.04.22	UNIT: mm(in.)	A				
CHECKED	PIQI	2009.04.22	CAD NO	B				
APPROVED	MARS	2009.04.22	R7410-xxFx	C				

TOLERANCE UNLESS NOTED

LINEAR±	.0 ±0.30(.012)
	.00 ±0.20(.008)
	.000±0.10(.004)

PROJECTION:

D-SUB MALE 180° PCB TYPE

MATERIAL

Insulator:	PBT UL 94-V0
Color:	Blue/Black/White
Contact:	Brass , t=0.20mm
Contacts Plating:	Selective gold
Shell:	Cold rolled stell , t=0.40mm
Shell Plating:	Tin/Nickel plated

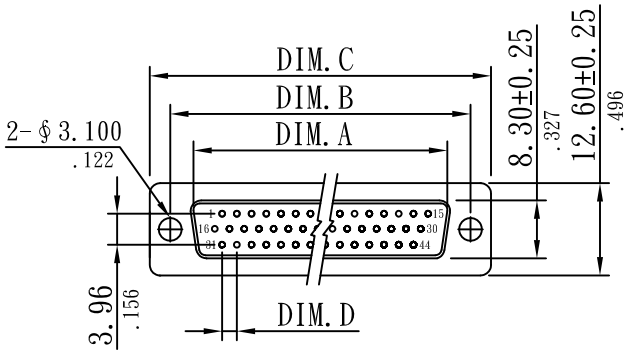

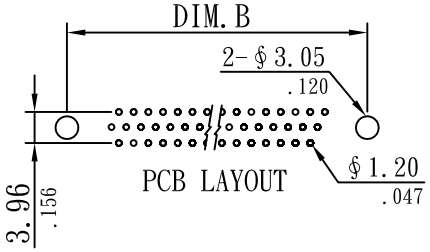

SPECIFICATIONS

Temperature range:	-55℃ ~ +105℃
Current rating:	1.0A
Dielectric withstand voltage:	500V AC
Insulation resistance:	1000 MΩ Min.
Contact resistance:	0.03Ω Max.

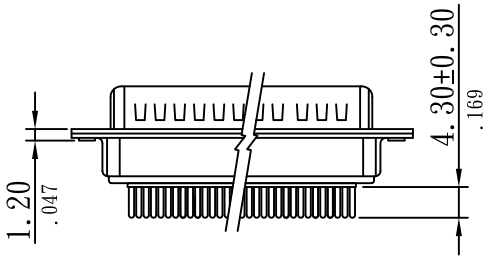

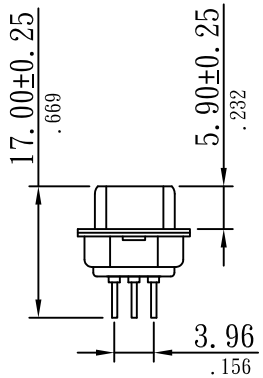

Order Information

R 7410-xx M x

1 2 3 4 5

1. RoHS
2. Series No.
3. Pin No.
4. Male
5. Color:
   A=Black G=Blue J=White

Dimensional Information

Circuits	DIM. A		DIM. B		DIM. C		DIM. D	
	mm	in	mm	in	mm	in	mm	in
15	16.92	0.666	25.00	0.984	30.80	1.213	2.29	0.090
26	25.25	0.994	33.32	1.312	39.20	1.543	2.29	0.090
44	38.96	1.534	47.04	1.852	53.05	2.089	2.29	0.090
62	55.42	2.182	63.50	2.500	69.40	2.732	2.41	0.095

SUNNY YOUNG ENTERPRISE CO., LTD.
工 程
2019.08.12
承認章
杰洋企業有限公司

Sunny Young Enterprise Co.,Ltd.
S.Y.E. http://www.sunnyyoung.com.tw
13F.,No.116,Sec.1,Xintai 5th Rd.,Xizhi Dist.,New Taipei City 221,Taiwan
Tel:+886 2 2696 1668(REP) Fax:+886 2 2696 2668

PART NO	R7410-xxMx

T041	NAME	DATE	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED
DRAWN	YXF	2011.07.22	UNIT:mm(in.)	A				
CHECKED	PIQI	2011.07.22	CAD NO	B				
APPROVED	TINA	2011.07.22	R7410-xxMx	C				

TOLERANCE UNLESS NOTED

LINEAR±
.0 ±0.30(.012)
.00 ±0.20(.008)
.000±0.10(.004)

PROJECTION: